

HGV-lift (22 t, 33 t, 30 t or 45 t)

Item No.: 550-4 (22 t) | 550-6 (33 t) | 575-4 (30 t) | 575-6 (45 t)

400 V

Autom.



550-4 | 550-6 | 575-4 | 575-6 << HGV-lift

Description

Mobile HGV lift:

22 and 30 t – Available in a 4 wheel version

33 and 47 t – Available in a 6 wheel version

Ideal for confined spaces, these lifts can be moved as easily as a pallet lift on all hard flat surfaces.

Robust in design.

The 4-series can be upgraded to a 6-series version at any time. The main column generally has 6 connections.

Features

- 11A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Top quality solid construction
- Can be controlled from every column
- Control can be switched from a single, to a combined lift
- Easy to move
- 4 or 6 electrical motors provide powerful lifting capability
- Transporter adapters optionally available

Delivery contents

- Complete HGV lift
- English instruction manuals
- Examination book
- CE-Certificate
- Optional: Adapters for the TW HGV lift (enables you to lift small transporters and trucks)
- [Product video online](#)



Product video




Combined power:
4 column variant
(Item No.: 550-4 or 575-4)

Combined power:
6 column variant
(Item No.: 550-6 or 575-6)




Details

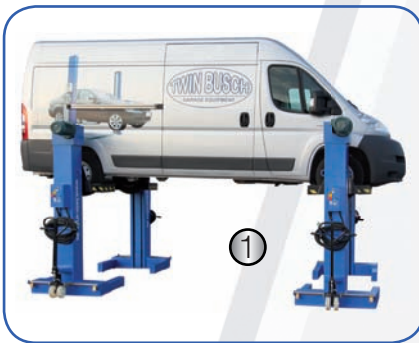

- (1) Also suitable for transporters (2) As easy to move as a pallet lift (3) Extreme safe fit
(4) Main control unit (5) Control possible from each column

Dimensions and technical data

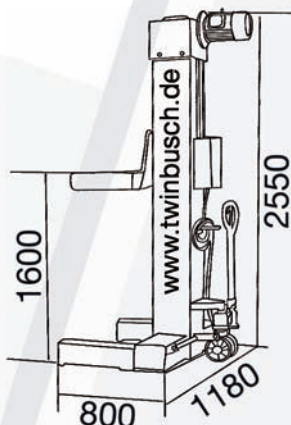

Technical Data	550-4	550-6	575-4	575-6
Lifting capacity	22000 kg	33000 kg	30000 kg	45000 kg
Per post	5500 kg	5500 kg	7500 kg	7500 kg
Lifting height max.	1600 mm	1600 mm	1600 mm	1600 mm
Lifting, lowering time (approx.)	10 mm/s	10 mm/s	10 mm/s	10 mm/s
Motor power	4 x 3,0 kW	6 x 3,0 kW	4 x 3,0 kW	6 x 3,0 kW
Power supply	400 V / 3 Ph.	400 V / 3 Ph.	400 V / 3 Ph.	400 V / 3 Ph.
Fusing	32 A (type C)	32 A (type C)	32 A (type C)	32 A (type C)
Weight (approx.)	2400 kg	3600 kg	3000 kg	4500 kg