

# Scissor lift

Under floor | *Item No.: TW SA-42U-V2*

400 V

Autom.

4200 kg



TW SA-42U-V2 << Scissor lift - Under floor

## Description

Lifting platform lift for level floor installation with **integrated wheel free lift**. The integrated wheel free lift allows the complete vehicle (car) to be lifted with all four wheels free. Furthermore, the TW SA-42U-V2 has rails fitted in the ramps, which allows the use of an additional wheel free jack (TW 445W). With integrated LED lighting on both sides of the complete length of the ramp. Also suitable as an MOT working lift or as a headlight testing station.

## Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- CE-Stop and signal tone when lowering
- Hydraulic Synchronization control
- Free wheel jack with extensions
- Rails for the usage of a jack
- Automatic safety-lock-release system
- Ramp with anti roll off safety
- LED lighting possibilities on the lift
- Compressed air of 4-8 bar
- **NEW: ANTI LIFT UP-Button** for precise lifting of the platform. This button temporarily overrides the automatic / time switching relays of the platform

## Delivery contents

- Lift incl. Power unit
- Axle free jack | Rubber blocks | Sliding plates
- 6 cover plates (turntable is optional)
- Examination book | CE-Certificate
- English instruction manuals
- *Product video online*



NEW: ANTI LIFT UP-Button



Product video  
YouTube

optionally available:



Axle free jack  
TW 445W

Turntable  
TW 445D





## Details



- (1) Cut out with 6 cover plates and optional turntable for a flexible usage from small to large wheelbase vehicles (2) Rear sliding plates (3) Rails for optional free wheel jack (4) Integrated LED lighting (5) Integrated wheel free jack (6) Easy to use control box (7) Automatic safety-lock-release system

## Dimensions and technical data

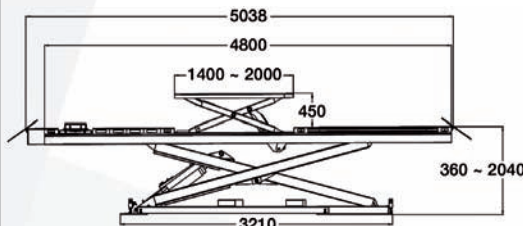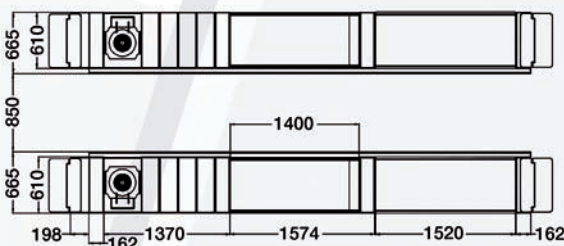

Technical Data: TW SA-42U-V2	
Lifting capacity	4200 kg
Lifting height max.	2040 + 450 mm
Platform L./ W.	5000/610 mm
Lifting, lowering time (approx.)	45/30 sec.
Power supply	400 V / 3 Phase
Motor power	2,2 kW
Fusing	16 A / type C
Weight (approx.)	2050 kg