

Basic-Line Lift

Item No.: TW 242 G

230 V

Manuell

4200 kg



TW 242 G << 2-Post-lift

Description

Garage Model - Recommended for garages with limited space and low ceilings.

The TW 242 G is designed for Garages with limited space, with it's width of 3 meters and a post height of 2,32 meters it is perfect for normal garages. With adjustable lifting pads and a flat floor plate of 35 cm.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- **Width only 3 m**
- **Post height 2,32 m**
- **Lifting height 1,60 m**
- **Perfect for normal garages**
- Mechanical safety locking mechanism
- High quality special profile supporting posts
- 2 Hydraulic cylinders for powerful lifting and lowering
- Automatic arm-locking system
- Steel cable synchronization
- Duel manual unloading
- Telescopic lifting arms

Delivery contents

- Lift incl. Power unit
- Heavy duty anchor bolts (10 pcs.)
- Rubber door protectors
- English instruction manual
- Examination book and CE-Certificate

Our new Model - width of 3 meters and a post height of 2,32 meters



Product video



Assembly video




Note try our technical decision helper (on page 6) before buying your 2-post lift(s)!

optionally available:

Transporter adapters (4 pcs.)
See page 31!




Details

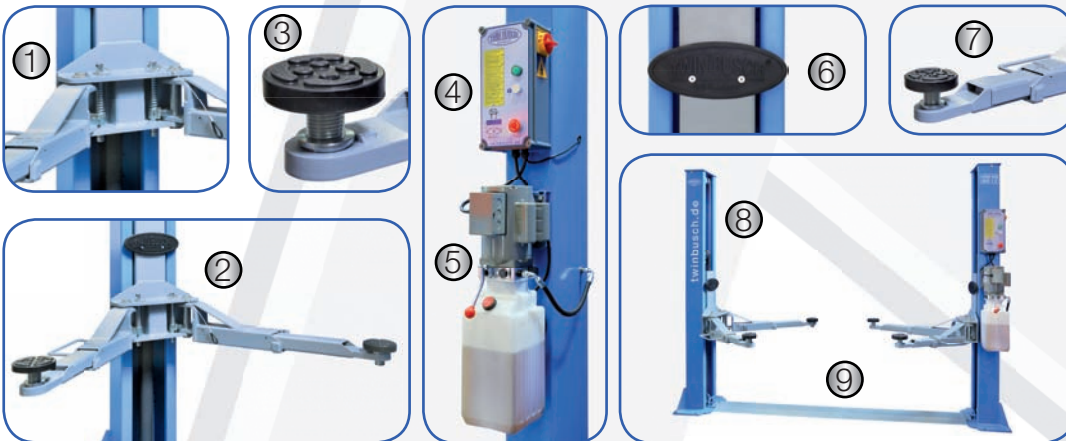


- (1) Automatic arm-locking system
- (2) Asymmetric lifting-arms
- (3) Height-adjustable lifting pads
- (4) Powerful E-Motor
- (5) IP 54 Electric-box
- (6) Door protector
- (7) Low lifting point: 96 mm
- (8) Post height 2,32 m
- (9) 35 mm high floor plate

Dimensions and technical data | The optional base plate reinforcement

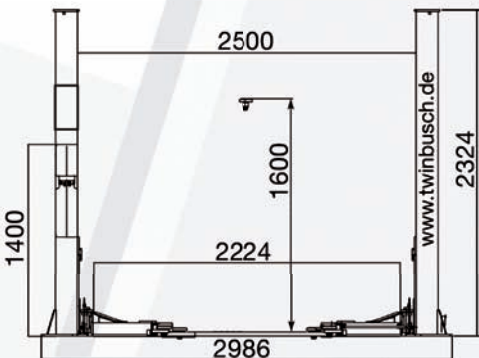

If space is a problem, the lift can also be constructed narrower than the specified total width! How it works? Contact us!

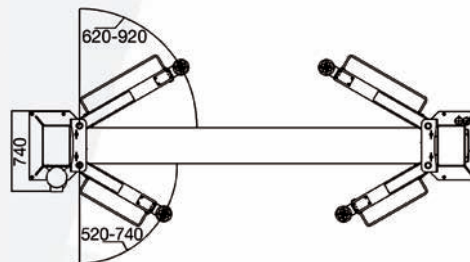

Through experience the required concrete depth (foundation requirement of 200 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer on page 31 a special solution, which can be used with a concrete thickness of 150 mm to 200 mm.

Technical Data: TW 242 G	
Lifting capacity	4200 kg
Lifting height max.	1600 mm/Ad 1740
Lowest lifting point	96 mm
Lifting, lowering time (approx.)	45/30 sec.
Power supply	230 V
Motor power	2,2 kW
Fusing	16 A / type C
Weight (approx.)	540 kg