

# 4-Post-parking lift

Item No.: TW436P / TW436P-G

Manuell

3600 kg



230 V



NEW: GREY-Line

oder  
Now also available in anthracite!

Included: Wheel chocks



## Description

The practical 4 post parking lift. With its optional mobile kit you can use this lift in very tight spaces and with the optional offset motor brackets you can assemble more lifts along side of each other.

## Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Hydraulic overflow valve
- A hydraulic cylinder underneath the runway provides powerful lifting and lowering capabilities
- Mechanical safety lock
- Manual safety-lock-release
- Cable break safety device
- Roll on-off protection
- Foot protection
- Acoustic warning signal

## Delivery contents

- Lift incl. Power unit
- Examination book and CE-Certificate
- Wheel chocks included (2 pcs.)
- *Product video online*
- *Assembly video*



Product video






Assembly video



optionally available:



## Details

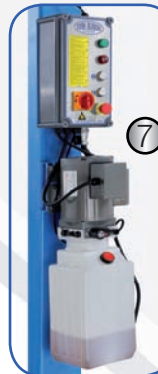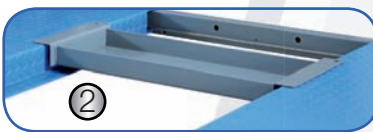

(1) Design Example with three parking lifts side by side (2) Cross beam (3) Wide drive on ramps (4) optional Offset plates (reduces the overall width of the lift of 2900 mm to just 2640 mm) (5) Foot protection when lowering (6) Including wheel chocks (7) Powerful electric motor (8) Manual lock release system (9) Optionally available: Oil drip tray

## Dimensions and technical data



Maximum vehicle wheel base (under the lift): 2040 mm

Maximum width between posts: 2380 mm

Maximum width on the lift: 2280 mm

Secured clearance: ca. 1730 mm

First catch position (adjustable) at approximately 450 mm (safety 100 mm apart)

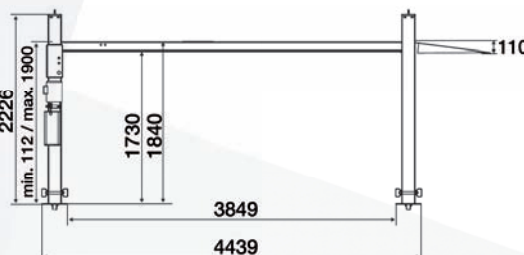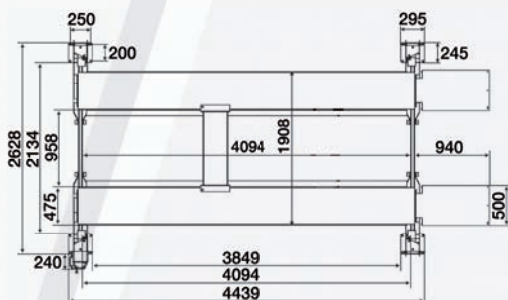

Technical Data: TW436P / TW436P-G	
Lifting capacity	3600 kg
Lifting height max.	1900 mm
Runway (L./W.)	4094/475 mm
Lifting, lowering time (approx.)	45/30 sec.
Power supply	230 V
Motor power	2,2 kW
Fusing	16 A / type C
Weight (approx.)	830 kg