

Tyre changer

Semi-automatic Swing-arm design | *Item No.: TW X-98*



TW X-98 < < Tyre changer

Description

Our multi-talent for all standard, low profile and run flat tyres. Two help-arms for more efficiency.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Mounting head can be moved to the side
- Solid construction
- Pneumatic mounting head adjustment
- Powerful bead breaker (2500 kg)
- Self centering 4-jaw clamping system
- Large clamping range for cars and vans (Outside 12"- Inside 28")
- Integrated air booster in the clamping jaws
- Exchangeable plastic protectors for the mounting head
- High quality stainless steel components in the inner part
- Precise control block with STOP function
- Powerful electrical motor
- Clamping jaws made of special steel

Delivery contents

- Tyre changer with maintenance unit
- Air filler and lifting lever
- Bead press and edge protection
- Plastic protectors for the clamping jaws (4 pcs.)
- Plastic protectors for the mounting head (set 3 pcs.)
- Operating instructions | CE-Certificate
- *Product video online | Assembly video*



⊕ 14"-28"

⊕ 12"-26"

⚡ 230 V

or*

⚡ 400 V

Both versions available

NEW



Bead press and edge protection included free of charge!




Product video

YouTube

Assembly video

Check our technical decisions helper (on page 44) before you buy your Tyre fitting machine


Details

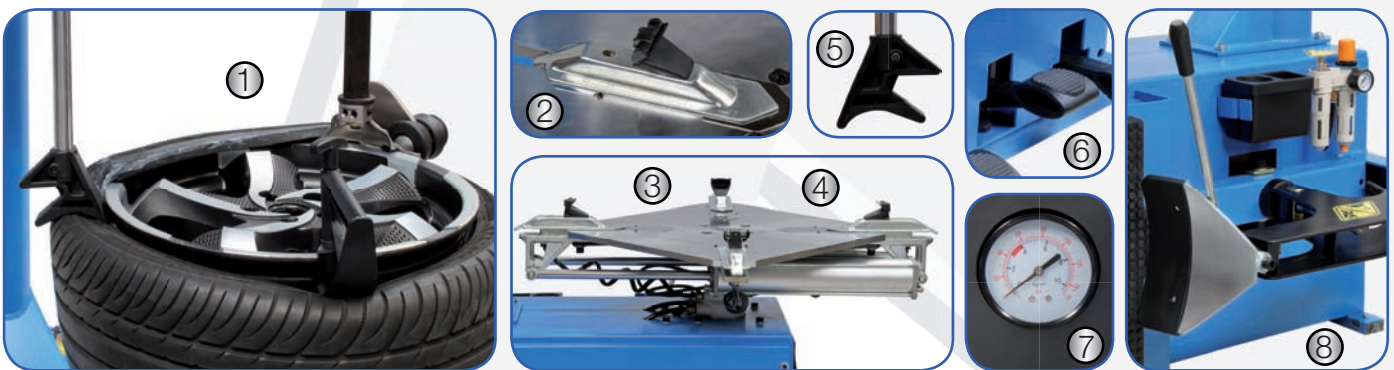

- (1) Two help-arms for more efficiency (2) Special steel clamps (3) Powerful air jets in all clamping jaws (4) Large clamping range (5) Bead press (6) Foot pedals (7) Tyre inflator (8) Powerful bead breaker

Dimensions | Technical data | Accessories

*Please note: The products are being sold as the 400-volt model, if desired, please specify the 230-volt version.

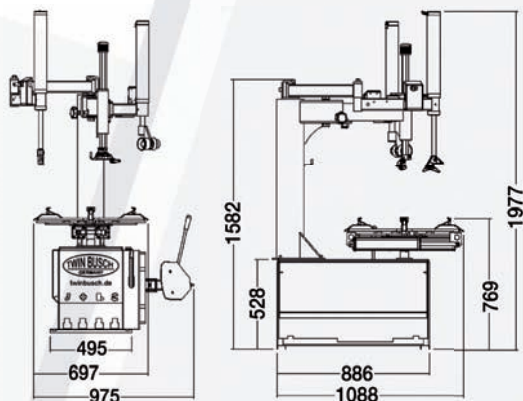

Extensive accessories

Technical Data: TW X-98	
Clamping range outside	12" - 26"
Clamping range inside	14" - 28"
Wheel diameter (max.)	45" (1143 mm)
Wheel width (max.)	16" (406 mm)
Bead breaker force	2500 kg
Air supply	8 - 10 bar
Power supply	400 V or 230 V*
Motor power	0,75 / 1,1 kW
Noise level	<70 dB
Weight (approx.)	276 kg